



## AD3L... LEVER OPERATED CETOP 3/NG6



1

Max. pressure ports P/A/B	320 bar
Max. pressure port T	160 bar
Max. flow	60 l/min
Lever angle	2 x 17°
Fluid viscosity	10 ÷ 500 mm²/s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	1,2 Kg
Weight M1 variant	1,8 Kg

AD3L...

STANDARD SPOOLS

CH. I PAGE 10

### ORDERING CODE

<b>AD</b>	Directional valve
<b>3</b>	CETOP 3/NG6
<b>L</b>	Lever operation
<b>**</b>	Spool type (see table 1) Spool symbol see page I•10
<b>*</b>	Mounting type (see table 2)
<b>*</b>	<b>Z</b> = Valve with lever <b>X</b> = Valve without lever
<b>*</b>	Variants (see table 3)
<b>4</b>	Serial No.

### TABLE 1 - SPOOLS TYPE


- For these valves spools are different from ones used on the other directional valves
- Available spools:  
01 / 02 / 03 / 04 / 05 / 06 / 66  
07 / 22 / 13 / 15 / 16 / 17

### TABLE 2 - MOUNTING TYPE

<b>C</b>	
<b>E</b>	
<b>F (1)</b>	

(1) For spools 15-16-17 the lever is mounted on site B


### OVERALL DIMENSIONS

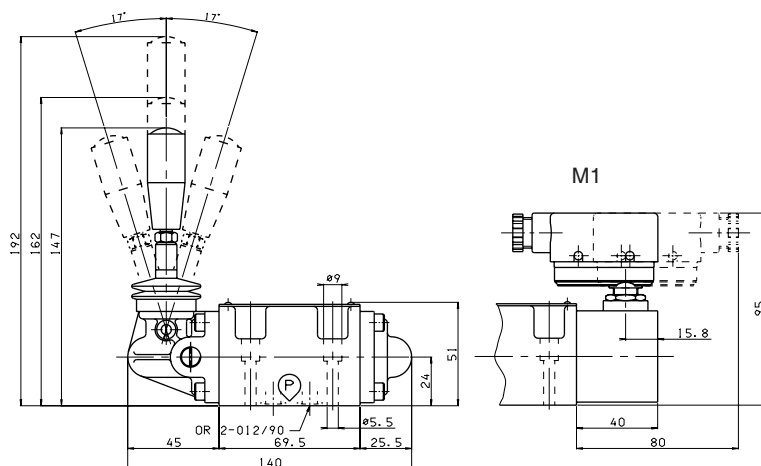

M1 = microswitch

Fixing screws UNI 5931 M5x30  
with material specifications min. 8.8  
Tightening torque 5 Nm / 0.5 Kgm

Support plane  
specifications








































### TABLE 3 - VARIANTS TABLE


































VARIANTS	CODE (♦)
No variant	00
Viton	V1
Preset for microswitch Microswitch type AM1107 code V79000001 can be ordered separately.	M1 (♦)
Preset for microswitch + Viton	MV (♦)
With detent (*) (mechanical connection) (Springs are different from those for standard versions)	D1 (♦)
Preset for microswitch + Detent (*)	MD (♦)
Lever length 162 mm	L1
Lever length 192 mm	L2
♦ Variant codes stamped on the plate	

(\*) max. 150.000 cycles.

## TWO SOLENOIDS, SPRING CENTRED “C” MOUNTING

Spool type		Covering	Transient position
01		+	
02		-	
03		+	
04*		-	
44*		-	
05		+	
66		+	
06		+	
07*		+	
08*		+	
09*		+	
10*		+	
22*		+	
11*		+	
12*		+	
13*		+	
14*		-	
28*		-	

## ONE SOLENOID, SIDE A “E” MOUNTING

Spool type		Covering	Transient position
01		+	
02		-	
03		+	
04*		-	
44*		-	
05		+	
66		+	
06		+	
08*		+	
10*		+	
12*		+	
15		-	
16		+	
17		+	
14*		-	
28*		-	

DIRECTIONAL CONTROL VALVES  
STANDARD SPOOLS CETOP 3/NG6

## NOTE










































(\*) Spool with price increasing

• With spools 15 / 16 / 17 only mounting E / F are possible







• 16 / 19 / 20 / 21 spool not planned for AD3E...J\*

• For lever operated the spools used are different.  
Available spools for this kind of valve see AD3L..

## ONE SOLENOID, SIDE B “F” MOUNTING

Spool type		Covering	Transient position
01		+	
02		-	
03		+	
04*		-	
44*		-	
05		+	
66		+	
06		+	
08*		+	
09*		+	
10*		+	
22*		+	
12*		+	
13*		+	
07*		+	
15		-	
16		+	
17		+	
14*		-	
28*		-	

## TWO SOLENOIDS “D” MOUNTING

Spool type		Covering	Transient position
19*		-	
20*		+	
21*		+	